


Features



- Constant current design
- Wide input voltage range
- Small and compact Size
- Protections:over-voltage/short circuit /overload
- No load power consumption<0.12W@220Vac
- 100% full load burn-in test
- Low cost,high reliability,isolated design
- 3 years warranty

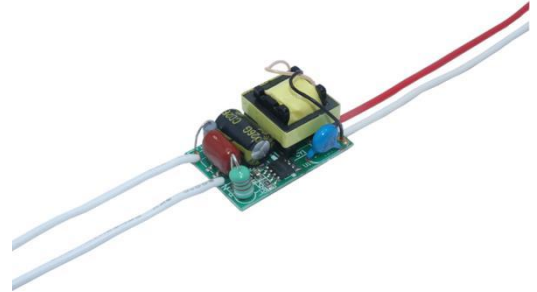

Applications


- Suitable for external power supply of lamps within 9W




Specifications and models

MODEL		HAD009BXI-A		
OUTPUT	DC VOLTAGE	3-6V	3-9V	9-24V
	RATED CURRENT	700MA	600MA	350MA
	FLOATING VOLTAGE	12V	12V	32V
	ACCURACY OF CURRENT	±5%		
	HOLD UP TIME	300ms&220Vac at full load		
INPUT	VOLTAGE RANGE &FREQUENCY RANGE	90-265Vac 50-60Hz		
	EFFICIENCY&220Vac	78%	80%	85%
ENVIRONMENT	WORKING TEMP AND HUMIDITY	-25~+60℃ 0~40% RH		
	STORAGE TEMP ANG HUMIDITY	-40~+80℃ 10~60% RH		
SAFETY&EMC	SAFETY STANDARDS	EN61347-2-13:2014+A1:2017;EN61347-1:2015+A1:2021; EN IEC60598-1:2021; EN62493:2015		
	EMC STANDARDS	EN IEC 55015:2019+A11:2020 ; EN IEC61000-3-2:2019;EN 61000-3-3:2013+A1:2019 EN61547:2009		
OTHERS	DIMENSION	32*22*18mm (L*W*H)		
	PACKING	15g		


Derating Curve

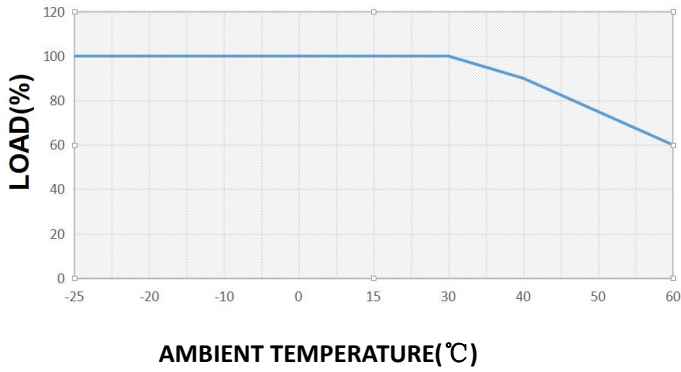

Static Character

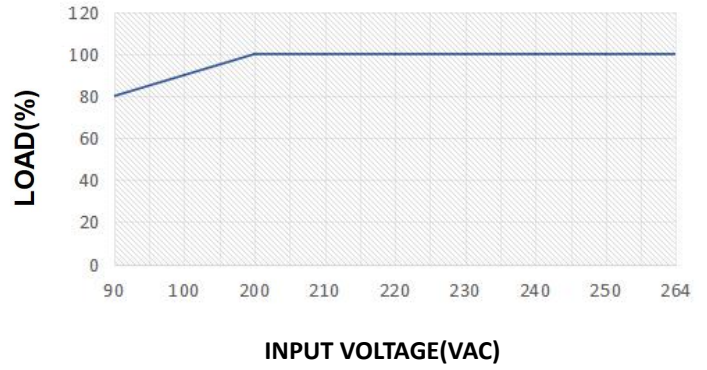

Block Diagram

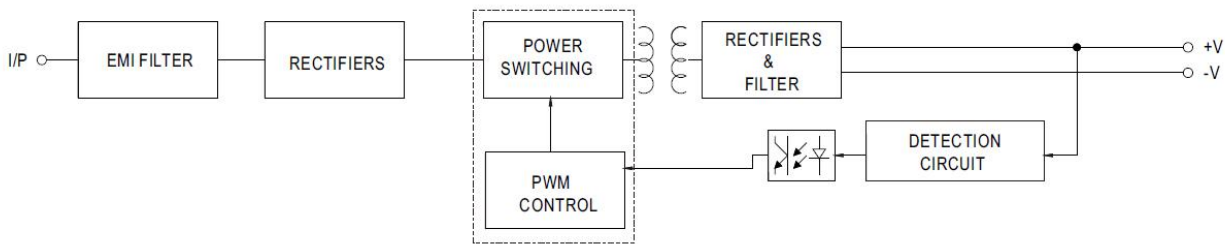

Mechanical Specification

