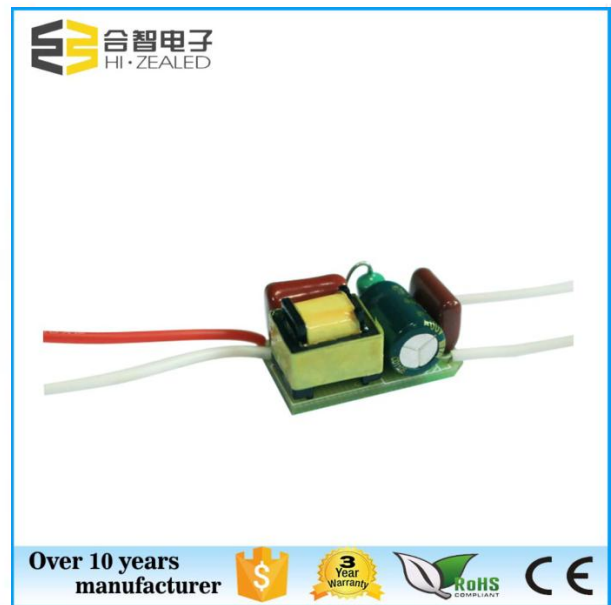


Constant current

Product Features

- Selectable constant current and constant voltage output.(Custom on request)
- Non-isolated,delivering up to 12W of power.
- Short circuit,over current and over voltage protection. Up to 90 % efficient.
- 2 years quality warranty
-


Technical Specifications

Output Mode	Constant Current		
Model No.	HAD012HXN		
Input Voltage Range	170-265V/AC		
AC Frequency	48-62Hz		
Input current	0.07Amax		
Setup time	<500ms /220Vac		
Output Current	280mA		
On Load Voltage	21-40V		
No Load Voltage	50V		
Output Power	12W Max.		
Power Factor	>0.6		
Efficiency	>88%		
THD / THDW	--		
Dimensions	25*17.5*14.6mm)		
Weight	8.2g		

Environmental Specifications


Operating Temperature	-30~45℃
Storage Temperature	-40~+70℃
Thermal Dissipation	Nature
Relative Humidity	5~95%
Isolation Voltage	--
Vibration	5-55Hz/2g,30Mimutes
Life Time	10000Hours,at TC max

Conformity & Standards

EMI	EN55022
Safety	--
Electromagnetic Immunity	EN61547,ENV5024
Harmonic Current Emissions	EN61000-3-2 EN61000-3-3

Installation Introduction

170-265Vac

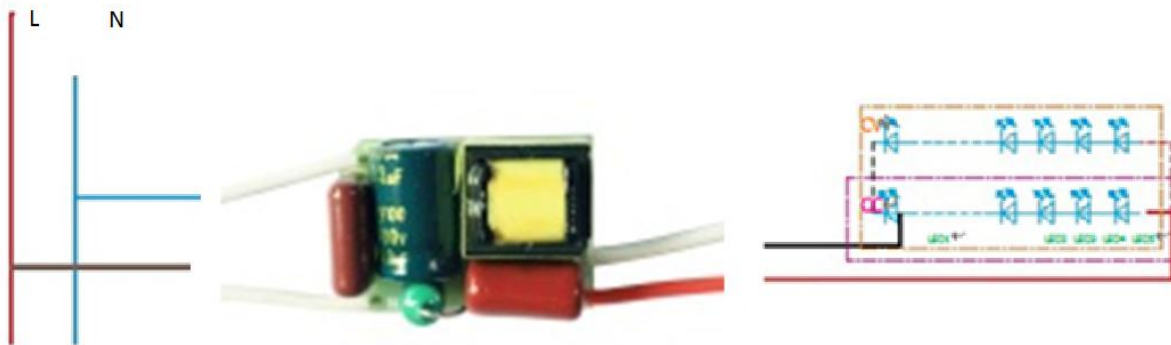

Dimensions Chart

